



Advanced Fuel Enhancer Gasoline Formula


Application

Slipstream® premium marine gasoline is specially formulated for marine engines and is designed to prevent the problems associated with ethanol blended gasoline such as: phase separation, moisture contamination, poor stability and the formation of power reducing carbon deposits.

Key Performance Benefits

- Helps to clean and keep clean intake valves and injectors which can result in optimized fuel economy, maximized power and acceleration and reduced emissions
- Helps prevent phase separation.
- Eliminates carbon, varnish and sludge.
- Reduces gum formation.
- Helps control harmful peroxide formation.
- Provides seasonal storage stability.
- Excellent combustion chamber deposit control.
- Good demulsibility.

Cleaning Properties

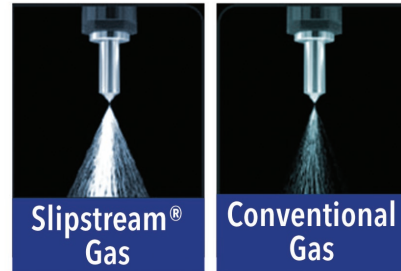

Typical Treat Rate

1 gallon additive/3,000 gallons of gasoline for optimum performance.

Special Handling Instructions:

- Keep away from potential sources of ignition.
- Store open container in well-ventilated area.
- Avoid breathing vapors.
- Keep containers closed when not in use.
- Empty containers retain material residue.
- Do not cut, weld, braze, solder, drill, grind or expose containers to heat, flame, spark or other sources of ignition.
- Read the M.S.D.S. for additional safety and handling information.

Typical Physical Properties

Specific Gravity @ 15.6° C (60° F)	0.873
Density per U.S. Gallon @15.6° C	7.29 lbs
Appearance	Clear Yellow Liquid
Flash Point (PMCC)	142° F
Viscosity, cSt @ 77° F	4.2
Viscosity, cSt @ 32° F	10.73
Viscosity, cSt @ 0° F	28.43
Viscosity, cSt @ -22° F	73.49

